

# 16GB Computer memory DDR3 for Cisco UCS C420 M3 RDIMM






# Your benefits ✓ verified quality memory ✓ 5 years warranty Warranty details see last page ✓ 100% compatible ✓ free support on our hotline ✓ fast delivery

# PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel



# Memory Specification

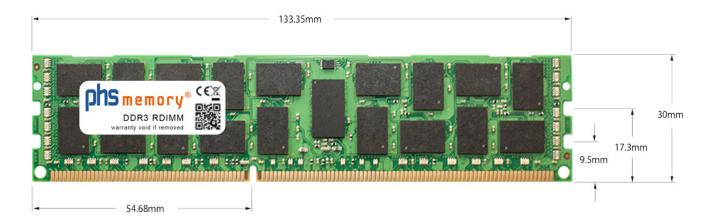

Memory size	16GB
Memory technology	DDR3
ECC support	ja
JEDEC Norm	PC3-12800R
Туре	RDIMM (ECC Registered)
Number of pins	240 Pin DIMM
Memory data transfer rate	1600MHz @ CL11
Speciality	-, DDP
Board dimensions	133,35 x 30 (LxB mm)
Operating temperature	0° C - 85° C
Operating temperature Storage temperature	0° C - 85° C -40° C - +95° C
Storage temperature	-40° C - +95° C
Storage temperature RoHS compliant	-40° C - +95° C Yes

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



# System Specifications

The memory is 100% compatible with this sytem:

Device typeServerDevice familyUCSDevice seriesC400 SerieDevice nameUCS C420 M3Maximum memory*1.5TB / 1,5TB according to manufacturerNumber of memory sockets48	System manufacturer	Cisco
Device series  C400 Serie  UCS C420 M3  Maximum memory*  1.5TB / 1,5TB according to manufacturer	Device type	Server
Device name  UCS C420 M3  Maximum memory*  1.5TB / 1,5TB according to manufacturer	Device family	UCS
Maximum memory*  1.5TB / 1,5TB according to manufacturer	Device series	C400 Serie
manufacturer	Device name	UCS C420 M3
Number of memory sockets 48	Maximum memory*	
	Number of memory sockets	48

<sup>\*</sup> The specifications for the maximum memory upgrade may differ from those of the manufacturer Cisco. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

# Information on memory allocation

### Which memory configuration is possible?

Our memory team will be happy to help you choose the right memory and configure your server.

Technologie		2 CPU 24Slot	4 CPU 48Slot	
	1 CPU 12Slot			
RDIMM	192GB RAM (12 x 16GB)	384GB RAM (24 x 16GB)	768GB RAM (48 x 16GB)	
LRDIMM	384GB RAM (12 x 32GB)			
		768GB RAM (24 x 32GB)	1,5TB RAM (48 x 32GB)	

#### Principles of memory assembly

- Each CPU has 4 memory channels with 3 memory slots each
- Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed
- Bei einer Aufrüstung sollten Sie deshalb wissen, welche memory bereits vorhanden sind or komplett auf RDIMM or LRDIMMcomputer memory upgrade.
- memorysteckplätze for die kein Prozessor vorhanden ist dürfen nicht bestückt werden
- Höhere memoryfrequenzen passen sich ggf. anderen memorytaktungen in der Systemumgebung an and unterstützen entsprechend langsamere Taktraten
- The low voltage memories with 1.35V are clocked with 1.5V when mixed with 1.5V memories via the fallback option in the memory.

#### Memory configuration for good system performance

- Verteilen Sie die memory gleichmäßig auf die memorysteckplätze and gleichmäßig auf die CPUs
- Wenn mehr als eine CPU vorhanden sind, sollten die memory pro CPU identisch (gespiegelt zur anderen CPU) bestückt werden.



# Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
  - Do not touch the gold pins of the memory module
  - Only touch the sides of the memory module
  - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.




# Further memory options for Cisco UCS C420 M3

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
8GB	SP232081	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	UCS- MR-1X082RY-A, UCS- MR-1X082RY-E
16GB	SP232080	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	UCS- MR-1X162RY-A, UCS- MR-1X162RY-E
32GB	SP465909	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP232079	DDR3	LRDIMM (ECC LR DIMM)	240 Pin DIMM	PHS-memory®	UCS- ML-1X324RY-A, UCS- ML-1X324RY-E

# PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.





# Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.com