
phs memory®

16GB Computer memory DDR3 for Supermicro SuperServer 2026T-6RFT+ RDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

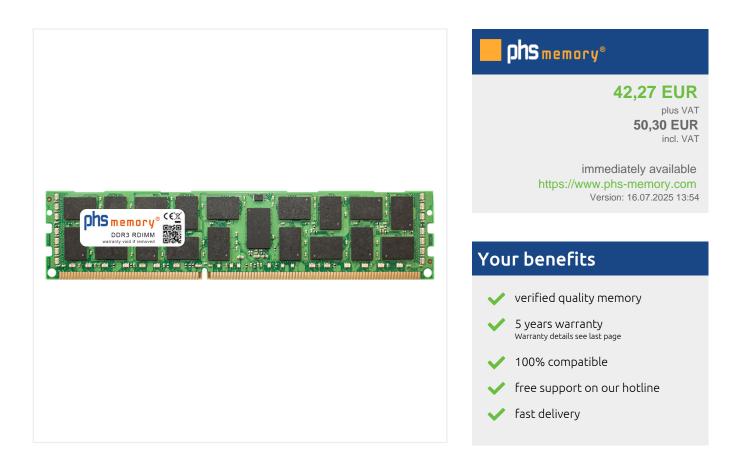

Memory Specification



Memory technologyDDR3ECC supportyesJEDEC NormPC3-10600RDRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDP
JEDEC NormPC3-10600RDRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9
DRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9
Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9
TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9
Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9
Memory data transfer rate 1333MHz @ CL9
-
Speciality - DDP
Board dimensions 133,35 x 30 (LxB mm)
Operating temperature 0° C - 85° C
Storage temperature -40° C - +95° C
RoHS compliant yes
SKU SP261044
EAN 4063369294912

overRAMing maximize your RAM



Most systems - including the Supermicro SuperServer 2026T-6RFT+ - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.com/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Supermicro
Device type	Server
Device family	SuperServer
Device series	2026 Serie
Device name	SuperServer 2026T-6RFT+
Maximum memory*	384GB ECC / 48GB according to manufacturer
Number of memory sockets	12
Annotation	You can use ECC UDIMM or RDIMM, but not mixed in the server. 48GB maximum with UDIMM (12 x 4GB) 384GB maximum with RDIMM (12 x 32GB). Optimal performance: Distribute the memories evenly across the memory slots and CPUs. We are happy to advise you!

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
- Do not touch the gold pins of the memory module
- Only touch the sides of the memory module
- Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



Further memory options for Supermicro SuperServer 2026T-6RFT+

Size S	SKU	Technology	Туре	Number of pins	Brand	Reference no.
4GB S	SP261047	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB S	SP261046	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB S	SP261042	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
16GB 5	SP261044	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
8GB S	SP261043	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB 5	SP261048	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
16GB 5	SP261045	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB 5	SP261049	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.



For more information on warranty and service please visit https://www.phs-memory.com/-W5Y

Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.com

phs memory[®]