
phs memory®

256GB Computer memory DDR4 for Fujitsu Primergy BX2580 M1 LRDIMM 3DS




PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

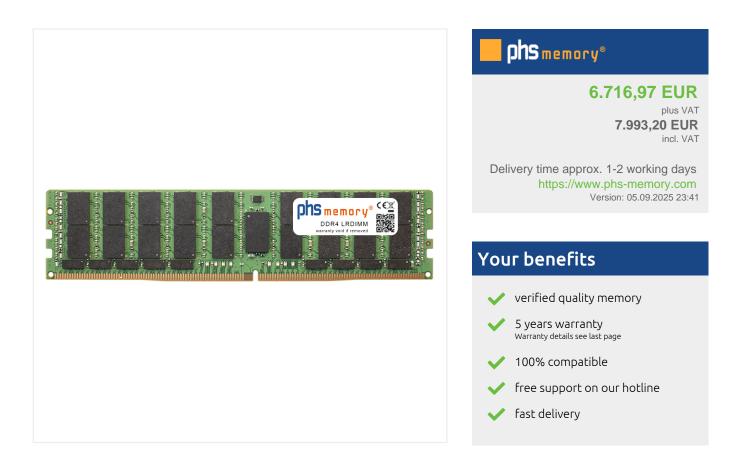

Memory Specification

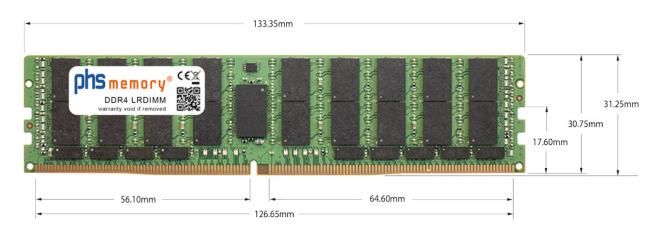

Memory size	256GB		
Memory technology	DDR4		
ECC support	yes		
JEDEC Norm	PC4-25600-L		
DRAM Organization	3DS 4H 16Gx4		
Rank	8Rx4 (2S4Rx4)		
Туре	LRDIMM (ECC LR DIMM) 3DS		
Number of pins	288 Pin DIMM		
Memory data transfer rate	3200MHz @ CL22		
Voltage	1,2 Volt		
Speciality	3DS		
Board dimensions	133,35 x 31,25 (LxB mm)		
Operating temperature	0° C - 85° C		
Storage temperature	-40° C - +95° C		
RoHS compliant	yes		
SKU	SP464074		
EAN	4067488275883		

overRAMing maximize your RAM



Most systems - including the Fujitsu Primergy BX2580 M1 - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.com/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Fujitsu			
Device type	Server			
Device family	Primergy			
Device series	BX2500 Serie			
Device name	Primergy BX2580 M1			
Maximum memory*	6TB / 1,5TB according to manufacturer			
Number of memory sockets	24			
Annotation	Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed By upgrading, you should therefore know which memories already exist or upgrade completely with LRDIMM memory.			

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Fujitsu. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Computer memory Bestückung BX2560 M1

- Das serverBoard D3321 im BX2580 M1 verfügt über insgesamt 24 memorysteckplätze.
- Es können nur die memory slots genutzt werden, deren zugehörige CPU gesteckt ist.
- Die Maximalkapazität of 1,5TB erreichen Sie with 24 x 64GB LR DIMM.
- RDIMM memory and LR DIMM memory sind technisch nicht witheinander kompatibel. Sie können deshalb diese beiden Technologien nicht gemischt im server witheinander betreiben.

Für weitere Fragen zur spezifischen Bestückung Ihres servers helfen wir Ihnen gerne weiter.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible



General installation instructions are supplied by E-Mail.



Further memory options for Fujitsu Primergy BX2580 M1

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
8GB	SP159198	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
16GB	SP159196	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
32GB	SP341745	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
64GB	SP464075	DDR4	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	
64GB	SP159195	DDR4	LRDIMM (ECC LR DIMM)	288 Pin DIMM	PHS-memory®	
128GB	SP464076	DDR4	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	
128GB	SP464073	DDR4	LRDIMM (ECC LR DIMM) 3DS	288 Pin DIMM	PHS-memory®	
256GB	SP464077	DDR4	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	
256GB	SP464074	DDR4	LRDIMM (ECC LR DIMM) 3DS	288 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.com/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online



shop at https://www.phs-memory.com