


96GB (3x32GB) Kit Computer memory DDR3 for Supermicro SuperServer 6026TT-D6IBXRF RDIMM



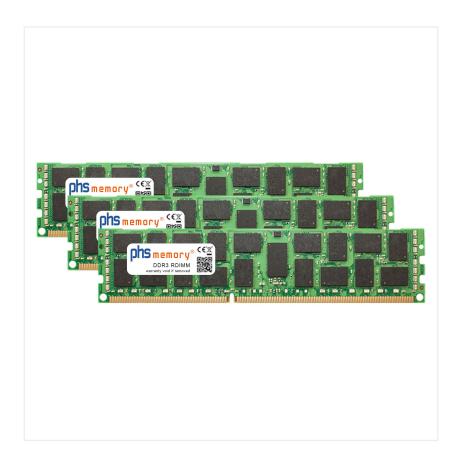

Your benefits ✓ verified quality memory ✓ 5 years warranty Warranty details see last page ✓ 100% compatible ✓ free support on our hotline ✓ fast delivery

PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel



Memory Specification



Memory technologyDDR3ECC supportjaJEDEC NormPC3-10600RDRAM Organization2Gx4Rank4Rx4 (4DRx4 DDP)TypeRDIMM (ECC Registered)Number of pins240 Pin DIMM
JEDEC Norm PC3-10600R DRAM Organization 2Gx4 Rank 4Rx4 (4DRx4 DDP) Type RDIMM (ECC Registered) Number of pins 240 Pin DIMM
DRAM Organization 2Gx4 Rank 4Rx4 (4DRx4 DDP) Type RDIMM (ECC Registered) Number of pins 240 Pin DIMM
Rank4Rx4 (4DRx4 DDP)TypeRDIMM (ECC Registered)Number of pins240 Pin DIMM
Type RDIMM (ECC Registered) Number of pins 240 Pin DIMM
Number of pins 240 Pin DIMM
·
Memory data transfer rate 1333MHz @ CL9
Speciality DDP
Board dimensions 133,35 x 30 (LxB mm)
Operating temperature $0^{\circ} \text{ C} - 85^{\circ} \text{ C}$
Storage temperature $-40^{\circ} \text{ C} - +95^{\circ} \text{ C}$
RoHS compliant Yes
SKU SP260114
EAN 4063369285736

overRAMing - maximize your RAM



Most systems - including the Supermicro SuperServer 6026TT-D6IBXRF - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.com/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Supermicro
Device type	Server
Device family	SuperServer
Device series	6026 Serie
Device name	SuperServer 6026TT-D6IBXRF
Maximum memory*	384GB / 288GB according to manufacturer
Number of memory sockets	12
Annotation	You can use ECC UDIMM or RDIMM, but not mixed in the server. 48GB maximum with UDIMM (6 x 8GB) 288GB (9 x 32GB) maximum with RDIMM. Optimal performance: Distribute the memories evenly across the memory slots and CPUs. We are happy to advise you!

^{*} The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

 $Memory\ modules\ with\ our\ over RAMing-symbol\ are\ approved\ by\ us\ for\ maximum\ memory\ expansion.$

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



Further memory options for Supermicro SuperServer 6026TT-D6IBXRF

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
4GB	SP260109	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP260117	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
8GB	SP260110	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP580263	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
16GB	SP260111	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
8GB	SP260118	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP260113	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
16GB	SP260112	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP260114	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.





Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

Product Datasheet | SP260114 32GB Computer memory for SuperServer 6026TT-D6IBXRF



All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.com