


48GB Computer memory DDR5 for bluechip SERVERline T40324s RDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

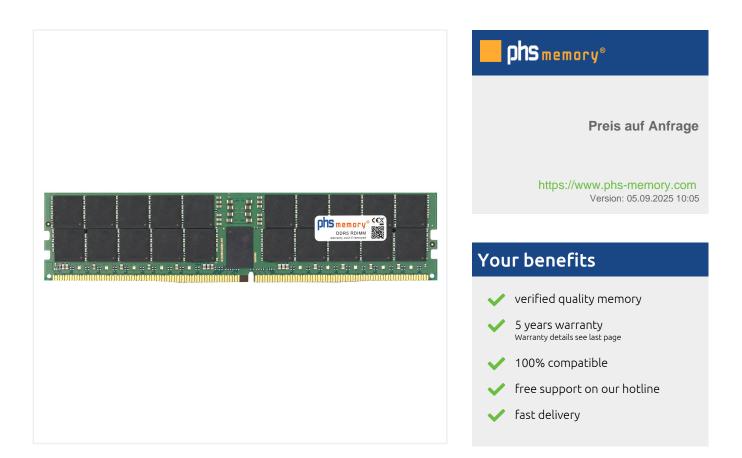

Memory Specification



48GB		
DDR5		
ja		
PC5-38400R		
3Gx8		
2Rx8		
RDIMM (ECC Registered)		
288 Pin DIMM		
4800MHz		
1,1 Volt		
-		
0° C - 85° C		
-40° C - +95° C		
Yes		
SP500432		
4067488643484		

Note: The module specified in this datasheet is one of several possible configurations available under this part number.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	bluechip
Device type	Server
Device family	SERVERline
Device series	T40300 Serie
Device name	SERVERline T40324s
Maximum memory*	ЗТВ
Number of memory sockets	12

* The specifications for the maximum memory upgrade may differ from those of the manufacturer bluechip. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
- Do not touch the gold pins of the memory module
- Only touch the sides of the memory module
- Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



Further memory options for bluechip SERVERline T40324s

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
16GB	SP500428	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
24GB	SP500429	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
32GB	SP500431	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
32GB	SP500430	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
48GB	SP500432	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
64GB	SP500434	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
96GB	SP500435	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
128GB	SP500436	DDR5	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	
256GB	SP500437	DDR5	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.com/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online



shop at https://www.phs-memory.com