
phs memory®

8GB Computer memory DDR3 for Fujitsu Primergy TX140 S2 UDIMM ECC



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

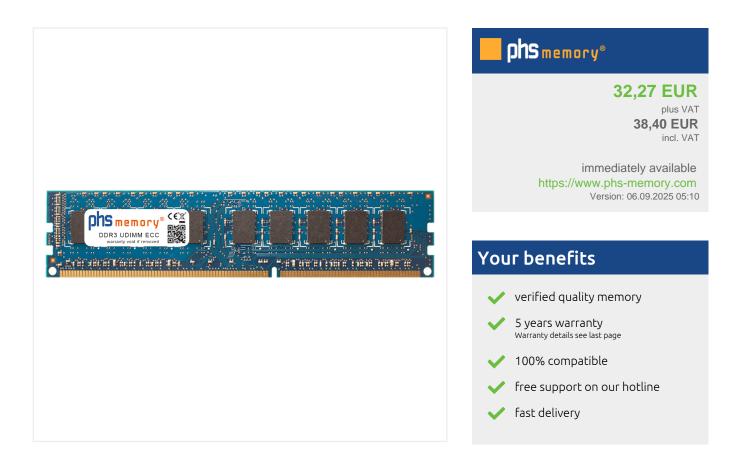

Memory Specification

-				
		9.5mm	17.3mm	30mm
	54.68mm	t		

Memory size	8GB		
Memory technology	DDR3		
ECC support	ja		
JEDEC Norm	PC3-10600E		
DRAM Organization	512Mx8		
Rank	2Rx8		
Туре	UDIMM ECC (ECC unbuffered)		
Number of pins	240 Pin DIMM		
Memory data transfer rate	1333MHz @ CL9		
Speciality	-		
Board dimensions	133,35 x 30 (LxB mm)		
Operating temperature	0° C - 85° C		
Storage temperature	-40° C - +95° C		
RoHS compliant	Yes		
SKU	SP142173		
EAN	4055069194821		

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Fujitsu		
Device type	Server		
Device family	Primergy		
Device series	TX100 Serie		
Device name	Primergy TX140 S2		
Maximum memory*	32GB		
Number of memory sockets	4		

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Fujitsu. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
- Do not touch the gold pins of the memory module
- Only touch the sides of the memory module
- Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.

phs memory®

Further memory options for Fujitsu Primergy TX140 S2

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
4GB	SP142172	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP142173	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.com/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.com