

128GB Computer memory DDR4 for Supermicro X10DRG-HT RDIMM 3DS


phs memory®			
1.092,77 EUR plus VAT 1.300,40 EUR incl. VAT immediately available https://www.phs-memory.com Version: 16.07.2025 10:50			
Your benefits			
verified quality memory			
5 years warranty Warranty details see last page			
✓ 100% compatible			
✓ free support on our hotline			
✓ fast delivery			

PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel



Memory Specification

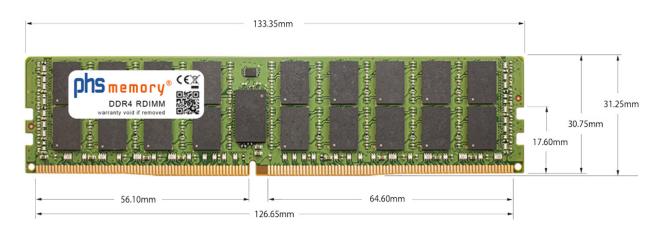

Memory technologyDDR4ECC supportyesJEDEC NormPC4-23400-RDRAM Organization3DS 2H 8Gx4Rank4Rx4 (2S2Rx4)TypeRDIMM (ECC Registered) 3DSNumber of pins288 Pin DIMMMemory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LXB mm)Operating temperatureo° C - 85° CStorage temperatureyesSKUSP472118EAN4067488356278	Memory size	128GB
JEDEC NormPC4-23400-RDRAM Organization3DS 2H 8Gx4Rank4Rx4 (2S2Rx4)TypeRDIMM (ECC Registered) 3DSNumber of pins288 Pin DIMMMemory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Memory technology	DDR4
DRAM Organization3DS 2H 8Gx4Rank4Rx4 (2S2Rx4)TypeRDIMM (ECC Registered) 3DSNumber of pins288 Pin DIMMMemory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperatureo° C - 85° CStorage temperatureyesSKUSP472118	ECC support	yes
Rank4Rx4 (2S2Rx4)TypeRDIMM (ECC Registered) 3DSNumber of pins288 Pin DIMMMemory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	JEDEC Norm	PC4-23400-R
TypeRDIMM (ECC Registered) 3DSNumber of pins288 Pin DIMMMemory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	DRAM Organization	3DS 2H 8Gx4
Number of pins288 Pin DIMMMemory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Rank	4Rx4 (2S2Rx4)
Memory data transfer rate2933MHz @ CL21Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Туре	RDIMM (ECC Registered) 3DS
Voltage1,2 VoltSpeciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Number of pins	288 Pin DIMM
Speciality3DSBoard dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Memory data transfer rate	2933MHz @ CL21
Board dimensions133,35 x 31,25 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Voltage	1,2 Volt
Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Speciality	3DS
Storage temperature-40° C - +95° CRoHS compliantyesSKUSP472118	Board dimensions	133,35 x 31,25 (LxB mm)
RoHS compliantyesSKUSP472118	Operating temperature	0° C - 85° C
SKU SP472118	Storage temperature	-40° C - +95° C
	RoHS compliant	yes
EAN 4067488356278	SKU	SP472118
	EAN	4067488356278

overRAMing maximize your RAM



Most systems - including the Supermicro X10DRG-HT - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.com/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Supermicro	
Device type	Server-Mainboard	
Device family	Mainboard X	
Device series	X10 Serie	
Device name	X10DRG-HT	
Maximum memory*	2TB / 1TB according to manufacturer	
Number of memory sockets	16	

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Information on memory configuration

The following technical specifications should be considered in advance:

- The system supports RDIMM and RDIMM 3DS (Registered DIMM) or LRDIMM and LRDIMM 3DS (Load Reduced DIMM) memory modules. Large memory capacities can be realised with LRDIMM 3DS modules.
- RDIMM and RDIMM 3DS memory modules cannot be operated together with LRDIMM and LRDIMM 3DS main memories.
- If a memory expansion is to be made with the already existing RAM memories, it must be checked which basic memory technology (RDIMM / LRDIMM) is available.
- Memory slots without a processor may not be used.
- A higher memory clock of the memory module automatically adapts to the memory clock specified by the system. This can be the case especially with larger capacities.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible



General installation instructions are supplied by E-Mail.



Further memory options for Supermicro X10DRG-HT

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
8GB	SP161425	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
16GB	SP161421	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
32GB	SP161423	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
64GB	SP464329	DDR4	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
64GB	SP161419	DDR4	LRDIMM (ECC LR DIMM)	288 Pin DIMM	PHS-memory®	
64GB	SP472119	DDR4	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	
128GB	SP472118	DDR4	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	
128GB	SP472117	DDR4	LRDIMM (ECC LR DIMM) 3DS	288 Pin DIMM	PHS-memory®	
128GB	SP253317	DDR4	LRDIMM (ECC LR DIMM)	288 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.com/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.com -Karl-Götz-Str. 5 97424 Schweinfurt Germany Phone: +49 9721 784678 E-Mail: info@phs-memory.com Web: www.phs-memory.com

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online



shop at https://www.phs-memory.com